
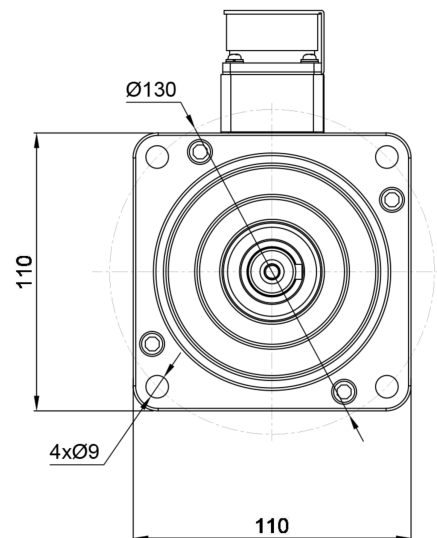


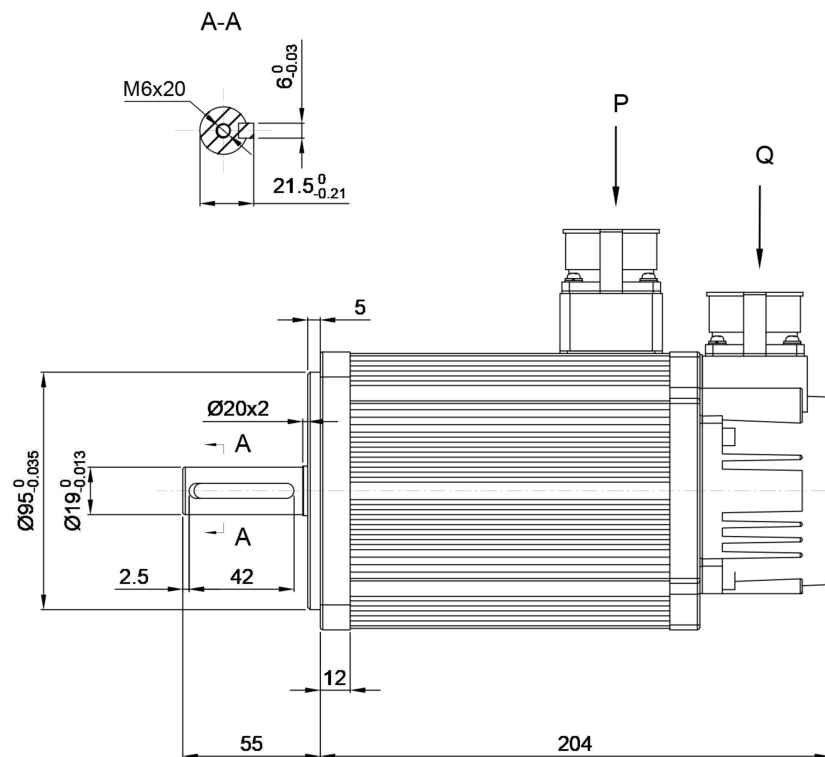

Technical data

Number of poles	8	P
Rated power	1500	W
Rated voltage	220	V/AC
Rated current	6	A
Rated speed	3000	rpm
Rated torque	5	N.m
Peak torque	15	N.m
Back EMF	62	V/1000r/min
Torque coefficient	0.83	N.m/A
Rotor inertia	0.63×10^{-3}	KG.M ²
Wire resistance	1.03	Ω
Wire inductance	3.43	mH
Electrical time constant	3.33	ms
Weight	6.8	KG


Encoder type	
Motor insulation class	Class F
Protection class	IP65
Use environment	Ambient temperature: -20°C~+40°C, ambient humidity <90% (no frost condition)

零件代号	
------	--

借(通)用件登记

电机绕组接线顺序				
信号引线	PE	U	V	W
插座编号	1	2	3	4

动力线航空插头(P向)



描校

旧底图总号


底图总号

签字

日期

绝对值编码器连接线7芯							
信号引线	PE	E-	E+	SD-	0V	SD+	+5V
插座编号	1	2	3	4	5	6	7

绝对值编码器插头(Q向)



版本	更改文件名	变更时间	变更人	变更内容						
	签名	年 月 日	图纸大小	质量	比例	名称 AC150M-11J30A				
设计			A3							
审核			材料							
工艺										
批准			共1张 第1张	版本	01	图号				