



图号/DWG NO.
86HS112-K1432-014



Technical drawing of a cable assembly. The drawing shows a cross-section of a cable with a central conductor and an outer jacket. The dimensions are as follows:

- Overall length: 112 ± 1
- Length of the central conductor: 32 ± 0.5
- Length of the outer jacket: 25
- Length of the central conductor jacket: 1.5
- Length of the outer jacket jacket: 10
- Length of the central conductor jacket jacket: 500 ± 10
- Length of the outer jacket jacket jacket: 10

The drawing also includes a label "A" indicating a specific point or feature on the cable.

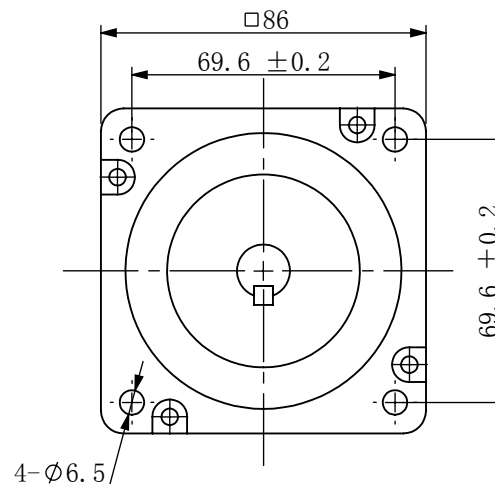

红 A+
RED

蓝 A-
BLUE

B+ 绿
GREEN

B- 黑
BLACK

M

步 距 角/STEP ANGLE	1.8° ±5%
相 数/NO. OF PHASES	2
额定电压/RATED VOLTAGE	3.18V
额定电流/RATED CURRENT	6.0A
电 阻/RESISTANCE	0.53ohm±10% AT25℃
电 感/INDUCTANCE	5.54mH±20% AT 1kHz, 1Vrms
保持力矩/HOLDING TORQUE	8.5N. m
运行力矩/(AT —PPS) RUNNING TORQUE(AT —PPS)	——以上/MIN (——V. DC, ——A/相(PHASE), ——相励磁/EX)
绝缘耐压/DIELECTRIC STRENGTH	500V A. C 1分钟/MINUTE
绝缘电阻/INSULATION RESISTANCE	100MΩ 以上/MIN.
绝缘等级/INSULATION CLASS	CLASS B
温度上升/TEMPERATURE RISE	80K MAX.
转子惯量/ROTOR INERTIA	2800g. cm ²
重 量/WEIGHT	约/APPROX. 3671克/g
允许轴向负载/ALLOWABLE THRUST LOAD	10N
允许径向负载/ALLOWABLE RADIAL LOAD	100N(轴端/ON THE SHAFT END)
运行环境温度/OPERATION AMBIENT TEMP.	-20℃——+50℃
运行环境湿度/OPERATION AMBIENT HUM.	15%——90%
寿 命/LIFE	5000小时/HOURS

1. 额定电流：两相同时通电/AT RATED CURRENT, TWO PHASES ON.
2. 热阻法：电机安装在84*84*15的铝板上，电机线圈两端通额定电压，OPPS /MEASURED BY RESISTANCE METHOD. MOUNT WITH ALUMINUM HEAT SINK 84*84*15 AT TWO WINDING BE EXCITED BY RATED VOLTAGE,OPPS,2PHASE ON.
3. 寿命测试条件：整步，运行速度为500PPS，轴承的表面温度不超过70° C
LIFE TEST CONDITION:2PHASE EXCITING, FULL STEP, AT 500PPS. STARTING PULSE, BEARING TEMPERATURE SHOULD BE 70° C MAX.

励磁顺序(2相励磁)VS. 旋转方向
EXCITING SEQUENCE(TWO PHESES)
VS. DIRECTION OF ROTATION

STEP	A+	B+	A-	B-
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

从安装面看为顺时针方向
CLOCKWISE VIEW FROM MOUNTING SIDE

已受控

CONFIRMED&ACCEPTED BY CUSTOMER (客户确认&接受)									
COMPANY CHOP&SIGNATURE (盖章&签名)									
一般公差 TOLERANCE	±0.3/±3°	版本 REV.	年 月 日 DATE	变更番号 ECR NO.	变 更 内 容 REVISIONS	设计 BY	备注 NOTE	REV.	A
设计/DESIGNED		比例 SCALE			型 号/MODEL 86ST85-14			三视图 THIRD ANGL PROJECTION	
审核/CHECKED		单位 UNIT	mm	第三角 投影 符号					
NINGBO SIMTACH AUTO TECH CO.,LTD							页 SHEET	1/1	